

## Data Sheet

# R-Series V RF5 POWERLINK

## Magnetostrictive Linear Position Sensors

Improved  
**flexible**  
sensor rod

- Flexible sensor rod with improved features
- Stroke length up to 20 m
- Field adjustments and diagnostics using the TempoLink® and TempoGate® smart assistants




**V**  
THE NEW GENERATION

## MEASURING TECHNOLOGY


The absolute, linear position sensors provided by Temposonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics® position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the beginning of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

## R-SERIES V RF5 POWERLINK


The Temposonics® R-Series V brings very powerful sensor performance to meet the many demands of your application. The RF5 sensor is the R-Series V with improved flexible sensor rod. The main advantages of the flexible sensor rod are:




**Straight and curved line**  
The flexible sensor rod enables position measurement on straight and also curved line.



**Compact for transport and storage**  
For transport and storage, the RF5 sensor can be coiled up. This saves costs and space.



**Installation with little space**  
Due to the bendable rod, the RF5 sensor can be installed even if only little space is available.



**Large stroke length range**  
The sensor is available with stroke lengths from 150 mm to 20,000 mm and thus can be used in both short and long distance applications.


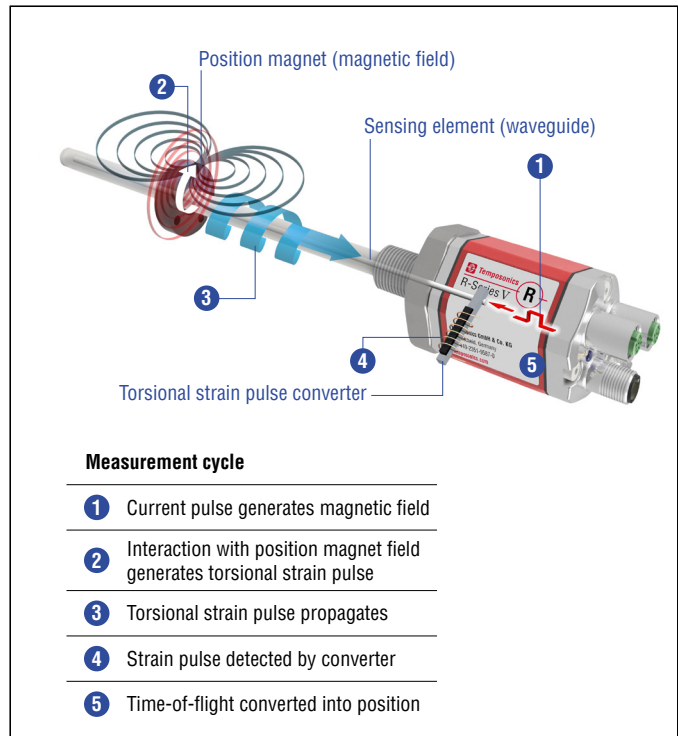


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

In addition the R-Series V POWERLINK scores with the following features:



**30 positions simultaneously**  
The R-Series V POWERLINK can detect and report the position and velocity of up to 30 magnets simultaneously.



**R-Series V POWERLINK**  
In addition to the measured position value via the POWERLINK protocol further data about the current sensor status, such as the total distance travelled, the internal temperature and the total operating hours, can be displayed for diagnostic purposes.

**All settings under control with the smart assistants for the R-Series V**  
The TempoLink® and the TempoGate® smart assistants support you in setup and diagnostics of the R-Series V. For more information of these assistants please see the data sheets:

- TempoLink® smart assistant  
(Document part number: [552070](#))
- TempoGate® smart assistant  
(Document part number: [552110](#))




## ADVANTAGES OF THE R-SERIES V RF5 COMPARED TO THE R-SERIES V RFV

**R-Series V RFV**  
(previous design)



**R-Series V RF5**  
(improved design)

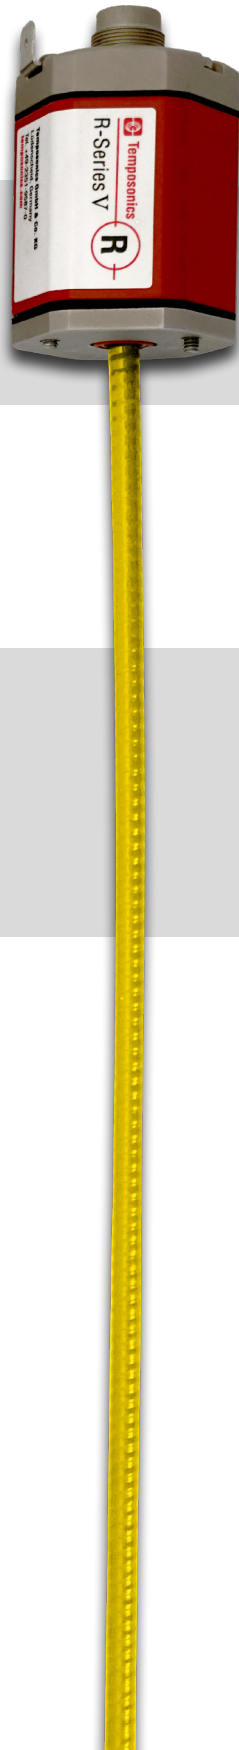

The first magnetostrictive sensor with a flexible sensor rod was developed and introduced to the market by Temposonics over 25 years ago. With this experience, we have further developed the sensor to improve handling in your application. The R-Series V RF5 offers you the following advantages:

### Shortened non-flexible area

- Compared to the previous design, the non-flexible area of the RF5 has been reduced by more than 70 % from 107 mm to 30 mm.
- *This makes it easier to install the sensor, especially in confined spaces.*

### Smooth transition


- The transition between the non-flexible and flexible areas is designed to be smooth.
- *This makes it easier to install the sensor in your application.*

### Reduced outer diameter and bending radius

- The outer diameter of the flexible sensor rod has been reduced to 6.4 mm
- This now allows a minimum bending radius of the flexible sensor rod of 100 mm.
- *This makes it easier to install the sensor, especially in confined spaces.*

### Increased ingress protection

- The RF5-B base unit meets the ingress protection IP68 (3 d/3 m) (connectors and flange correctly fitted).
- Therefore, the internal waveguide is protected against the ingress of water.
- *This improves the longevity of the sensor in your application.*

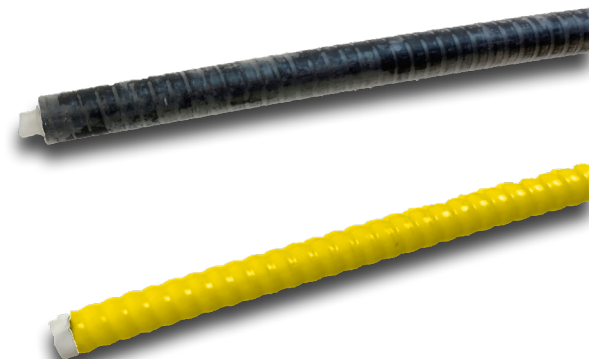

## TECHNICAL DATA

Output						
Interface	Ethernet POWERLINK					
Data protocol	POWERLINK V2					
Data transmission rate	100 MBit/s (maximum)					
Measured value	Position, velocity/option: Simultaneous multi-position and multi-velocity measurements up to 30 magnets					
Measurement parameters						
Resolution: Position	0.5...100 µm (selectable)					
Cycle time <sup>1</sup>	Stroke length	≤ 715 mm	≤ 2000 mm	≤ 4675 mm	≤ 10,000 mm	≤ 20,000 mm
	Cycle time	500 µs <sup>2</sup>	1000 µs	2000 µs	4000 µs	8000 µs
Linearity deviation <sup>3</sup>	< ±0.02 % F.S. (minimum ±100 µm)					
Repeatability	< ±0.001 % F.S. (minimum ±2.5 µm) typical					
Hysteresis	< 4 µm typical					
Temperature coefficient	< 15 ppm/K typical					
Operating conditions						
Operating temperature	-40...+85 °C (-40...+185 °F)					
Humidity	90 % relative humidity, no condensation					
Ingress protection	IP68 (3 d/3 m) (connectors and flange correctly fitted)					
Shock test	100 g/6 ms, IEC standard 60068-2-27 (when guided in a support pipe, e.g. sensor rod HD/HL/HP)					
Vibration test	5 g/10...2000 Hz, IEC standard 60068-2-6 (excluding resonant frequencies) (when guided in a support pipe, e.g. sensor rod HD/HL/HP)					
EMC test	Electromagnetic emission according to EN 61000-6-3					
	Electromagnetic immunity according to EN 61000-6-2					
	With EMC-compliant installation, the RF5 sensors fulfill the requirements of EMC directives 2014/30/EU, UKSI 2016 No. 1091 and TR ZU 020/2011. <sup>4</sup>					
Magnet movement velocity	Any					
Design/Material						
Sensor electronics housing	Aluminum (painted), zinc die cast					
Sensor flange	Stainless steel 1.4305 (AISI 303)					
Sensor rod	Stainless steel conduct with PU coating					
RoHS compliance	The used materials are compliant with the requirements of EU Directive 2011/65/EU and EU Regulation 2015/863 as well as UKSI 2022 No. 622 with amendments					
Stroke length	150...20,000 mm (6...787 in.)					
Mechanical mounting						
Mounting position	Any					
Mounting instruction	Please consult the technical drawings on <a href="#">page 5</a> and in the operation manual ( <a href="#">document number: 552010</a> )					
Electrical connection						
Connection type	2 × M12 female connectors (D-coded), 1 × M8 male connector or 2 × M12 female connectors (D-coded), 1 × M12 male connector (A-coded)					
Operating voltage	+12...30 VDC ±20 % (9.6...36 VDC); The RF5 sensors must be power supplied via an external Class 2 power source in accordance with the UL approval					
Power consumption	Less than 4 W typical					
Dielectric strength	500 VDC (DC ground to machine ground)					
Polarity protection	Up to -36 VDC					
Overvoltage protection	Up to 36 VDC					

1/ These values refer to a single position measurement


2/ Minimum cycle time for multi-position measurements (number of magnets ≥ 2): 400 µs

3/ With position magnet # 251 416-2

4/ The flexible sensor element must be mounted in an appropriately shielded environment.

## TECHNICAL DRAWING


### RF5-B – RF5 base unit (without flange & rod assembly), example: Connection type D56 (connector outlet)

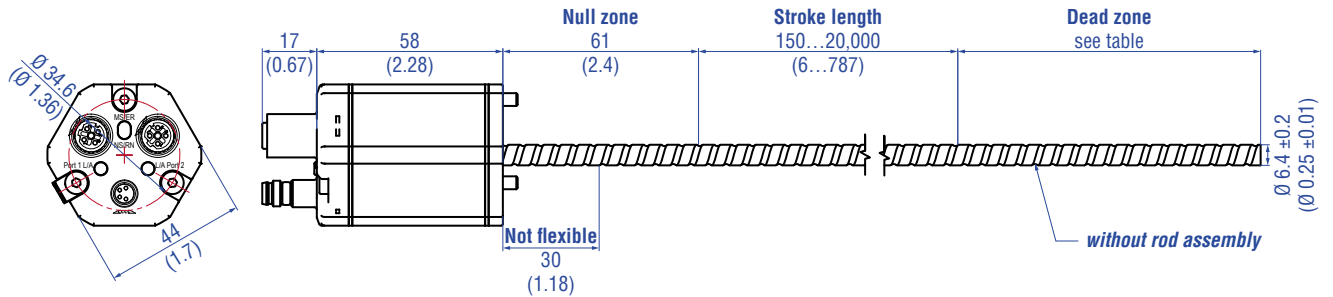

Stroke length	Tolerance of total length	Dead zone
Up to 7620 mm (300.00 in.)	±5 mm (0.20 in.)	94 mm (3.70 in.)
Up to 10,000 mm (393.70 in.)	±10 mm (0.39 in.)	100 mm (3.94 in.)
Up to 15,000 mm (590.55 in.)	±15 mm (0.59 in.)	120 mm (4.72 in.)
Up to 20,000 mm (787.00 in.)	±20 mm (0.79 in.)	140 mm (5.51 in.)

**Note:** Tolerance of total length has no influence on the stroke length.

### RF5-B – RF5 base unit (without flange & rod assembly), example: Connection type D58 (connector outlet)

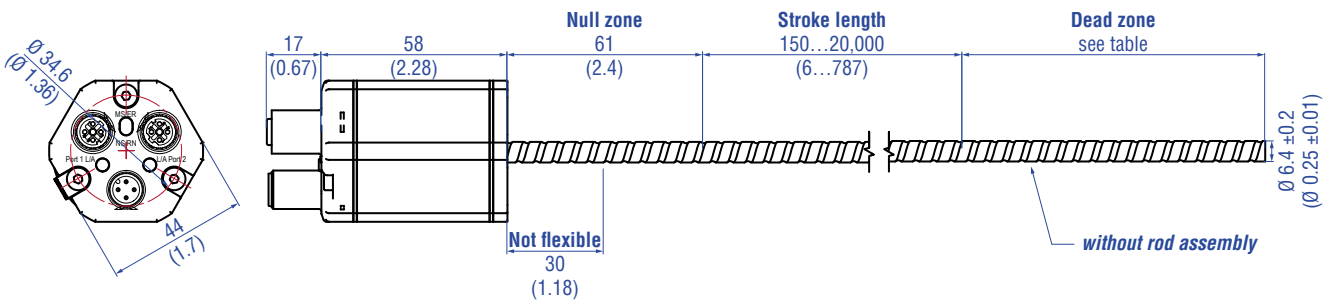

Stroke length	Tolerance of total length	Dead zone
Up to 7620 mm (300.00 in.)	±5 mm (0.20 in.)	94 mm (3.70 in.)
Up to 10,000 mm (393.70 in.)	±10 mm (0.39 in.)	100 mm (3.94 in.)
Up to 15,000 mm (590.55 in.)	±15 mm (0.59 in.)	120 mm (4.72 in.)
Up to 20,000 mm (787.00 in.)	±20 mm (0.79 in.)	140 mm (5.51 in.)

**Note:** Tolerance of total length has no influence on the stroke length.

Controlling design dimensions are in millimeters and measurements in ( ) are in inches

Fig. 2: Temposonics® RF5

## CONNECTOR WIRING




D58		
<b>Port 1 – Signal</b>		
<b>M12 female connector (D-coded)</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
	4	Rx (-)
<b>Port 2 – Signal</b>		
<b>M12 female connector (D-coded)</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
	4	Rx (-)
<b>Power supply</b>		
<b>M12 male connector (A-coded)</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	+12...30 VDC (±20 %)
	2	Not connected
	3	DC Ground (0 V)
	4	Not connected

Fig. 3: Connector wiring D58














D56		
<b>Port 1 – Signal</b>		
<b>M12 female connector (D-coded)</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
	4	Rx (-)
<b>Port 2 – Signal</b>		
<b>M12 female connector (D-coded)</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
	4	Rx (-)
<b>Power supply</b>		
<b>M8 male connector</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	+12...30 VDC (±20 %)
	2	Not connected
	3	DC Ground (0 V)
	4	Not connected

Fig. 4: Connector wiring D56

**FREQUENTLY ORDERED ACCESSORIES** – Additional options available in our [Accessories Catalog](#) 551444

Position magnets			
			
<p><b>U-magnet OD33</b> Part no. 251416-2</p>	<p><b>Ring magnet OD60</b> Part no. MT0162</p>	<p><b>Ring magnet</b> Part no. 402 316</p>	<p><b>U-magnet OD63.5</b> Part no. 201 553</p>
<p>Material: PA ferrite GF20 Weight: Approx. 11 g Surface pressure: Max. 40 N/mm<sup>2</sup> Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)</p>	<p>Material: AlCuMgPb, magnets compound-filled Weight: Approx. 90 g Surface pressure: Max. 20 N/mm<sup>2</sup> Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F)</p>	<p>Material: PA ferrite coated Weight: Approx. 13 g Surface pressure: Max. 20 N/mm<sup>2</sup> Operating temperature: -40...+100 °C (-40...+212 °F)</p>	<p>Material: PA 66-GF30, magnets compound-filled Weight: Approx. 26 g Surface pressure: 20 N/mm<sup>2</sup> Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F)</p>
O-rings		Mounting accessories	
			
<p><b>O-ring for threaded flange</b> <b>M18x1.5-6g</b> Part no. 401 133</p>	<p><b>O-ring for threaded flange</b> <b>3/4"-16 UNF-3A</b> Part no. 560 315</p>	<p><b>Hex jam nut M18x1.5-6g</b> Part no. 500 018</p>	<p><b>Hex jam nut 3/4"-16 UNF-3A</b> Part no. 500 015</p>
<p>Material: Fluoroelastomer Durometer: 75 ±5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)</p>	<p>Material: Fluoroelastomer Durometer: 75 ±5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)</p>	<p>Material: Steel, zinc plated</p>	<p>Material: Steel, zinc plated</p>
Mounting accessories			
			
<p><b>Threaded flange M18x1.5-6g</b> Part no. 404 874</p>	<p><b>Threaded flange 3/4"-16 UNF-3A</b> Part no. 404 875</p>		
<p>Material: Stainless steel 1.4305 (AISI 303) Order O-rings separately: O-ring 15x2: Part no. 560 853 O-ring 15.3x2.2: Part no. 401 133</p>	<p>Material: Stainless steel 1.4305 (AISI 303) Order O-rings separately: O-ring 15x2: Part no. 560 853 O-ring 16.4x2.2: Part no. 560 315</p>		

Mounting accessories



**Sensor rod with threaded flange with flat-face (M18x1.5-6g) and O-ring**  
**HD [length mm: XXXX] M**  
**HD [length in.: XXX.X] U**

Pressure rod Ø: 12.7 mm (0.5 in.)  
 Length: 100...7500 mm (4...295 in.)  
 Operating pressure: 350 bar (5076 psi)  
 Material flange:  
 Stainless steel 1.4305 (AISI 303)  
 Material rod:  
 Stainless steel 1.4301 (AISI 304)



**Sensor rod with threaded flange with flat-face (3/4"-16 UNF-3A) and O-ring**  
**HL [length mm: XXXX] M**  
**HL [length in.: XXX.X] U**

Pressure rod Ø: 12.7 mm (0.5 in.)  
 Length: 100...7500 mm (4...295 in.)  
 Operating pressure: 350 bar (5076 psi)  
 Material flange:  
 Stainless steel 1.4305 (AISI 303)  
 Material rod:  
 Stainless steel 1.4301 (AISI 304)



**Sensor rod with threaded flange with raised-face (3/4"-16 UNF-3A) and O-ring**  
**HP [length mm: XXXX] M**  
**HP [length in.: XXX.X] U**

Pressure rod Ø: 12.7 mm (0.5 in.)  
 Length: 100...7500 mm (4...295 in.)  
 Operating pressure: 350 bar (5076 psi)  
 Material flange:  
 Stainless steel 1.4305 (AISI 303)  
 Material rod:  
 Stainless steel 1.4301 (AISI 304)







**Profile with flange**  
**HFP [length mm: XXXXX] M**  
**HFP [length in.: XXXX.X] U**

Length: Max. 20,000 mm (max. 787 in.)  
 Ingress protection: IP30  
 Material: Aluminum



**Cable connectors\* – Signal**

**Cable connectors\* – Power**



**M12 D-coded male connector (4 pin), straight**  
Part no. 370 523

**M12 connector end cap**  
Part no. 370 537

**M12 A-coded female connector (4 pin/5 pin), straight**  
Part no. 370 677

**M8 female connector (4 pin), straight**  
Part no. 370 504

Material: Zinc nickel-plated  
Termination: Insulation-displacement  
Cable Ø: 6...7.2 mm (0.2...0.28 in.)  
Wire: 24 AWG – 22 AWG  
Operating temperature:  
–25...+85 °C (–13...+185 °F)  
Ingress protection: IP65 / IP67 (correctly fitted)  
Fastening torque: 0.6 Nm


Female connectors M12 should be covered by this protective cap  
Material: Brass nickel-plated  
Ingress protection: IP67 (correctly fitted)  
Fastening torque: 0.39...0.49 Nm

Material: GD-Zn, Ni  
Termination: Screw  
Contact insert: CuZn  
Cable Ø: 4...8 mm (0.16...0.31 in.)  
Wire: max. 1.5 mm<sup>2</sup> (16 AWG)  
Operating temperature:  
–30...+85 °C (–22...+185 °F)  
Ingress protection: IP67 (correctly fitted)  
Fastening torque: 0.6 Nm

Material: CuZn nickel plated  
Termination: Solder  
Cable Ø: 3.5...5 mm (0.14...0.28 in.)  
Wire: 0.25 mm<sup>2</sup>  
Operating temperature:  
–40...+85 °C (–40...+185 °F)  
Ingress protection: IP67 (correctly fitted)  
Fastening torque: 0.5 Nm

**Cables**

**Cable sets**



**PUR signal cable**  
Part no. 530 125

**PVC power cable**  
Part no. 530 108

**Signal cable with M12 D-coded male connector (4 pin), straight – M12 D-coded, male connector (4 pin), straight**  
Part no. 530 064

**Signal cable with M12 D-coded male connector (4 pin), straight – RJ45 male connector, straight**  
Part no. 530 065

Material: PUR jacket; green  
Features: Cat 5, highly flexible, halogen free, suitable for drag chains, mostly oil & flame resistant  
Cable Ø: 6.5 mm (0.26 in.)  
Cross section: 2 × 2 × 0.35 mm<sup>2</sup> (22 AWG)  
Bending radius: 6 × D (fixed installation)  
Operating temperature:  
–20...+60 °C (–4...+140 °F)

Material: PVC jacket; gray  
Features: Shielded, flexible, mostly flame resistant  
Cable Ø: 4.9 mm (0.19 in.)  
Cross section: 3 × 0.34 mm<sup>2</sup>  
Bending radius: 5 × D (fixed installation)  
Operating temperature:  
–30...+80 °C (–22...+176 °F)





Material: PUR jacket; green  
Feature: Cat 5e  
Cable length: 5 m (16.4 ft)  
Cable Ø: 6.5 mm (0.26 in.)  
Ingress protection: IP65, IP67, IP68 (correctly fitted)  
Operating temperature:  
–30...+70 °C (–22...+158 °F)

Material: PUR jacket; green  
Feature: Cat 5e  
Cable length: 5 m (16.4 ft)  
Cable Ø: 6.5 mm (0.26 in.)  
Ingress protection M12 connector: IP67 (correctly fitted)  
Ingress protection RJ45 connector: IP20 (correctly fitted)  
Operating temperature:  
–30...+70 °C (–22...+158 °F)

\*/ Follow the manufacturer's mounting instructions  
Controlling design dimensions are in millimeters and measurements in ( ) are in inches  
Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

# Temposonics® R-Series V RF5 POWERLINK

Data Sheet

Cable sets		Programming tools	
			
<p><b>Power cable with M8 female connector (4 pin), straight – pigtail</b>  <b>Part no. 530 066 (5 m (16.4 ft.))</b>  <b>Part no. 530 096 (10 m (32.8 ft.))</b>  <b>Part no. 530 093 (15 m (49.2 ft.))</b></p>	<p><b>Power cable with M12 A-coded female connector (5 pin), straight – pigtail</b>  <b>Part no. 370 673</b></p>	<p><b>TempoLink® kit for Temposonics® R-Series V</b>  <b>Part no. TL-1-0-EM08 (D56)</b>  <b>Part no. TL-1-0-EM12 (D58)</b></p>	<p><b>TempoGate® smart assistant for Temposonics® R-Series V</b>  <b>Part no. TG-C-0-Dxx</b>                      (xx indicates the number of R-Series V sensors that can be connected (even numbers only))</p>
<p>Material: PUR jacket; gray                      Feature: Shielded                      Cable Ø: 5 mm (0.2 in.)                      Operating temperature:                      -40...+90 °C (-40...+194 °F)</p>	<p>Material: PUR jacket; black                      Feature: Shielded                      Cable length: 5 m (16.4 ft)                      Ingress protection: IP67 (correctly fitted)                      Operating temperature:                      -25...+80 °C (-13...+176 °F)</p>	<ul style="list-style-type: none"> <li>• Connect wirelessly via Wi-Fi enabled device or via USB with the diagnostic tool</li> <li>• Simple connectivity to the sensor via 24 VDC power line (permissible cable length: 30 m)</li> <li>• User friendly interface for mobile devices and desktop computers</li> <li>• See data sheet “TempoLink® smart assistant” (document part no.: <a href="#">552070</a>) for further information</li> </ul>	<ul style="list-style-type: none"> <li>• OPC UA server for diagnostics of the R-Series V</li> <li>• For installation in the control cabinet</li> <li>• Connection via LAN and Wi-Fi</li> <li>• See data sheet “TempoGate® smart assistant” document part no.: <a href="#">552110</a> for further information</li> </ul>

Color of connectors and cable jacket may change. Colors of the cores and technical properties remain unchanged.

## ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
R	F	5										D	5		1	U	3	0	1
a			b	d						e		f		g	h				

<b>a</b>	<b>Sensor model</b>
R F 5	Flexible rod

<b>b</b>	<b>Design</b>
B	Base unit (without flange & rod assembly)

Section **c** is intentionally omitted.

<b>d</b>	<b>Stroke length</b>
X X X X X M	00150...20000 mm

Stroke length (mm)	Ordering steps
150... 1000 mm	50 mm
1000... 5000 mm	100 mm
5000...10000 mm	250 mm
10000...15000 mm	500 mm
15000...20000 mm	1000 mm

X X X X X U	0006.0...0787.0 in.
-------------	---------------------

Stroke length (in.)	Ordering steps
6... 40 in.	2 in.
40...197 in.	4 in.
197...394 in.	10 in.
394...591 in.	20 in.
591...787 in.	40 in.

Non standard stroke lengths are available; must be encoded in 5 mm/0.1 in. increments

<b>e</b>	<b>Number of magnets</b>
----------	--------------------------

X X	01...30 position(s) (1...30 magnet(s))
-----	--

<b>f</b>	<b>Connection type</b>
D 5 6	2 × M12 female connectors (D-coded), 1 × M8 male connector

D 5 8	2 × M12 female connectors (D-coded), 1 × M12 male connector (A-coded)
-------	--

<b>g</b>	<b>System</b>
1	Standard

<b>h</b>	<b>Output</b>
U 3 0 1	POWERLINK, position and velocity (1...30 magnet(s))

### NOTICE

- Specify the number of magnets for your application and order the magnets separately.
- The number of magnets is limited by the stroke length. The minimum allowed distance between magnets (i.e. front face of one to the front face of the next one) is 75 mm (3 in.).
- Use magnets of the same type for multi-position measurement.
- The sensor is without rod assembly. Always insert the flexible sensor rod in a support pipe (e.g. sensor rod HD/HL/HP or HFP profile).

### DELIVERY



- RF5-B:** Accessories have to be ordered separately.
- Base unit (without flange & rod assembly)
  - 3 × socket screws M4×59

Manuals, Software & 3D Models available at:  
[www.temposonics.com](http://www.temposonics.com)

## GLOSSARY

### E

#### Extrapolation

The native measurement cycle time of a sensor increases with the stroke length. With extrapolation, the sensor is able to report data faster than the native cycle time, independent of the stroke length of the sensor. Without extrapolation, if data is requested faster than the native cycle time, the last measured value is repeated.

### M

#### Multi-position measurement

During the measurement cycle, the positions of every magnet on the sensor are simultaneously reported. The velocity is continuously calculated based on these changing position values as the magnets are moved.

### N

#### Node ID

The addressing of the devices in a POWERLINK network is done via the node ID. Each node ID only exists once in a network. It can have a value between 1 and 240 (while 240 is reserved for the Managing Node). Meaning that a POWERLINK network can comprise up to 240 devices. With the R-Series V POWERLINK, the node ID (delivered with node ID 1) can be set via the TempoLink® smart assistant, for example.

### P

#### POWERLINK

POWERLINK is an Industrial Ethernet interface and is managed by the Ethernet POWERLINK Standardization Group (EPSG). The R-Series V POWERLINK and its corresponding XDD file are certified by the EPSG.

### S

#### Synchronization mode

R-Series V POWERLINK supports synchronization mode. The synchronization mode enables clock-synchronous data exchange between sensor and control. The synchronous measurement is an essential requirement for motion-controlled applications

### X

#### XDD file

The properties and functions of a POWERLINK device are described in an XDD file (XML Device Description). The XML-based XDD file contains all relevant data that are important for the implementation of the device in the controller as well as for data exchange during operation. The XDD file of the R-Series V POWERLINK is available on the homepage [www.temposonics.com](http://www.temposonics.com).

**UNITED STATES**  
**Temposonics, LLC**  
Americas & APAC Region  
3001 Sheldon Drive  
Cary, N.C. 27513  
Phone: +1 919 677-0100  
E-mail: [info.us@temposonics.com](mailto:info.us@temposonics.com)

**GERMANY**  
**Temposonics**  
**GmbH & Co. KG**  
EMEA Region & India  
Auf dem Schüffel 9  
58513 Lüdenscheid  
Phone: +49 2351 9587-0  
E-mail: [info.de@temposonics.com](mailto:info.de@temposonics.com)

**ITALY**  
Branch Office  
Phone: +39 030 988 3819  
E-mail: [info.it@temposonics.com](mailto:info.it@temposonics.com)

**FRANCE**  
Branch Office  
Phone: +33 6 14 060 728  
E-mail: [info.fr@temposonics.com](mailto:info.fr@temposonics.com)

**UK**  
Branch Office  
Phone: +44 79 21 83 05 86  
E-mail: [info.uk@temposonics.com](mailto:info.uk@temposonics.com)

**SCANDINAVIA**  
Branch Office  
Phone: +46 70 29 91 281  
E-mail: [info.sca@temposonics.com](mailto:info.sca@temposonics.com)

**CHINA**  
Branch Office  
Phone: +86 21 3405 7850  
E-mail: [info.cn@temposonics.com](mailto:info.cn@temposonics.com)

**JAPAN**  
Branch Office  
Phone: +81 3 6416 1063  
E-mail: [info.jp@temposonics.com](mailto:info.jp@temposonics.com)

**Document Part Number:**  
552210 Revision A (EN) 11/2024



ETHERNET   
**POWERLINK**  
certified product

**temposonics.com**