

## Data Sheet

# R-Series V RH EtherNet/IP™

## Magnetostrictive Linear Position Sensors

- EtherNet/IP™ with CIP Sync and DLR
- Position + velocity measurements for up to 20 magnets
- Field adjustments and diagnostics using the new TempoLink® smart assistant



**V**  
THE NEW GENERATION

## MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Temposonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

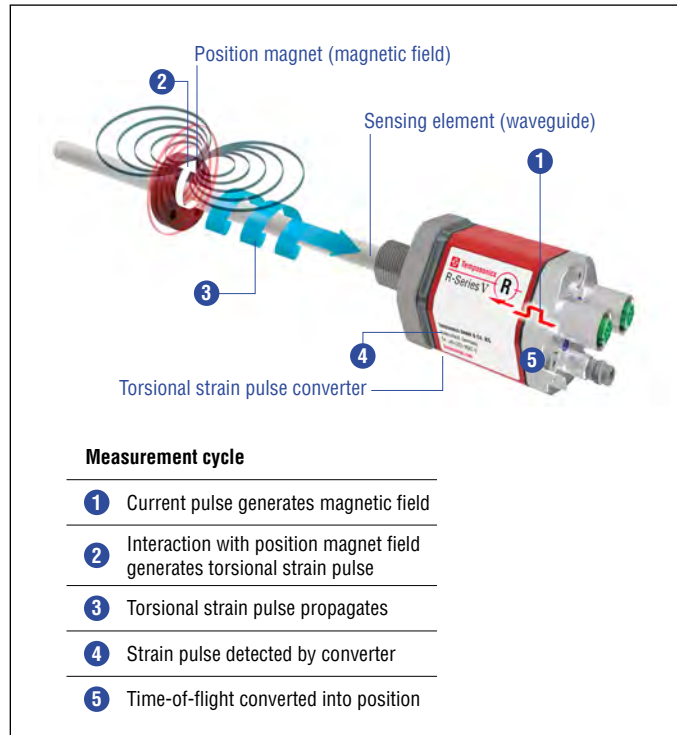


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

## R-SERIES V ETHERNET/IP™

Temposonics® R-Series V brings very powerful sensor performance to meet the many demands of your application. This series is the long term solution for harsh environments that have high levels of shock and vibration. The EtherNet/IP™ sensor supports CIP Sync™ (Common Industrial Protocol) and DLR (Device Level Ring) capabilities. CIP Sync™ offers synchronization between devices in an EtherNet/IP™ network, allowing for increased control coordination in time-critical applications. DLR capability provides a fault-tolerant network so that the sensor can be used in ring connection topologies when reliable continuous system operation is required. In addition, the sensors are available with internal linearization which offers improved linearity for overall higher accuracy of the position measurement values.

With many outstanding features the R-Series V sensors are fit for a very broad range of applications.

## TempoLink® SMART ASSISTANT

The TempoLink® smart assistant is an accessory for the R-Series V family of sensors that supports setup and diagnostics. Depending on the sensor protocol it enables the adjustment of parameters like measurement direction, resolution and filter settings. For diagnostics and analysis of operational data the R-Series V sensors continuously track values such as total distance traveled by the position magnet, internal temperature of the sensor and the quality of the position signal. This additional information can be read out via TempoLink® smart assistant even while the sensor remains operational in the application. TempoLink® smart assistant is connected to the sensor via the power connection, which now adds bidirectional communication for setup and diagnostics. The TempoLink® smart assistant is operated using a graphical user-interface that will be displayed on your smartphone, tablet, laptop or PC. Just connect your Wi-Fi-enabled device to TempoLink® Wi-Fi access point and go to the website URL for the user-interface.



Fig. 2: R-Series V sensor with TempoLink smart assistant

## TECHNICAL DATA

Output				
Interface	EtherNet/IP™			
Data protocol	Encoder CIP device profile with CIP Sync and DLR capabilities			
Data transmission rate	100 MBit/s (maximum)			
Measured value	Position, velocity / option: Simultaneous multi-position and multi-velocity measurements up to 20 magnets			
Measurement parameters				
Resolution: Position	1...500 µm (selectable)			
Cycle time	Stroke length	≤ 2000 mm	≤ 4800 mm	≤ 7620 mm
	Cycle time	1.0 ms	2.0 ms	3.0 ms
Linearity deviation <sup>1</sup>	Stroke length	≤ 500 mm	> 500 mm	
	Linearity deviation	≤ ±50 µm	< 0.01 % F.S.	
Repeatability	< ±0.001 % F.S. (minimum ±2.5 µm) typical			
Hysteresis	< 4 µm typical			
Temperature coefficient	< 15 ppm / K typical			
Operating conditions				
Operating temperature	-40...+85 °C (-40...+185 °F)			
Humidity	90 % relative humidity, no condensation			
Ingress protection	IP67 (connectors correctly fitted)			
Shock test	150 g / 11 ms, IEC standard 60068-2-27			
Vibration test	30 g / 10...2000 Hz, IEC 60068-2-6 (excluding resonant frequencies)			
EMC test	Electromagnetic emission according to EN 61000-6-3			
	Electromagnetic immunity according to EN 61000-6-2			
	The sensor meets the requirements of the EC directives and is marked with <b>CE</b>			
Operating pressure	350 bar (5076 psi) / 700 bar (10153 psi) peak (at 10 × 1 min) for sensor rod			
Magnet movement velocity	Any			
Design / Material				
Sensor electronics housing	Aluminum (painted), zinc die cast			
Sensor flange	Stainless steel 1.4305 (AISI 303) / RH5-J: Stainless steel 1.4305 (AISI 303)			
Sensor rod	Stainless steel 1.4306 (AISI 304L) / RH5-J: Stainless steel 1.4301 (AISI 304)			
Stroke length	25...7620 mm (1...300 in.)			
Mechanical mounting				
Mounting position	Any			
Mounting instruction	Please consult the technical drawings on <a href="#">page 4</a> and the operation manual (document number: <a href="#">551971</a> )			
Electrical connection				
Connection type	2 × M12 female connectors (5 pin), 1 × M8 male connector (4 pin), 2 × M12 female connectors (5 pin), 1 × M12 male connector (4 pin)			
Operating voltage	12...30 VDC ±20 % (9.6...36 VDC) <sup>2</sup>			
Power consumption	Less than 4 W typical			
Dielectric strength	500 VDC (DC ground to machine ground)			
Polarity protection	Up to -36 VDC			
Overvoltage protection	Up to 36 VDC			

1/ With position magnet # 251 416-2

2/ Power supply must be able to provide current of 1 A for power up process

## TECHNICAL DRAWING

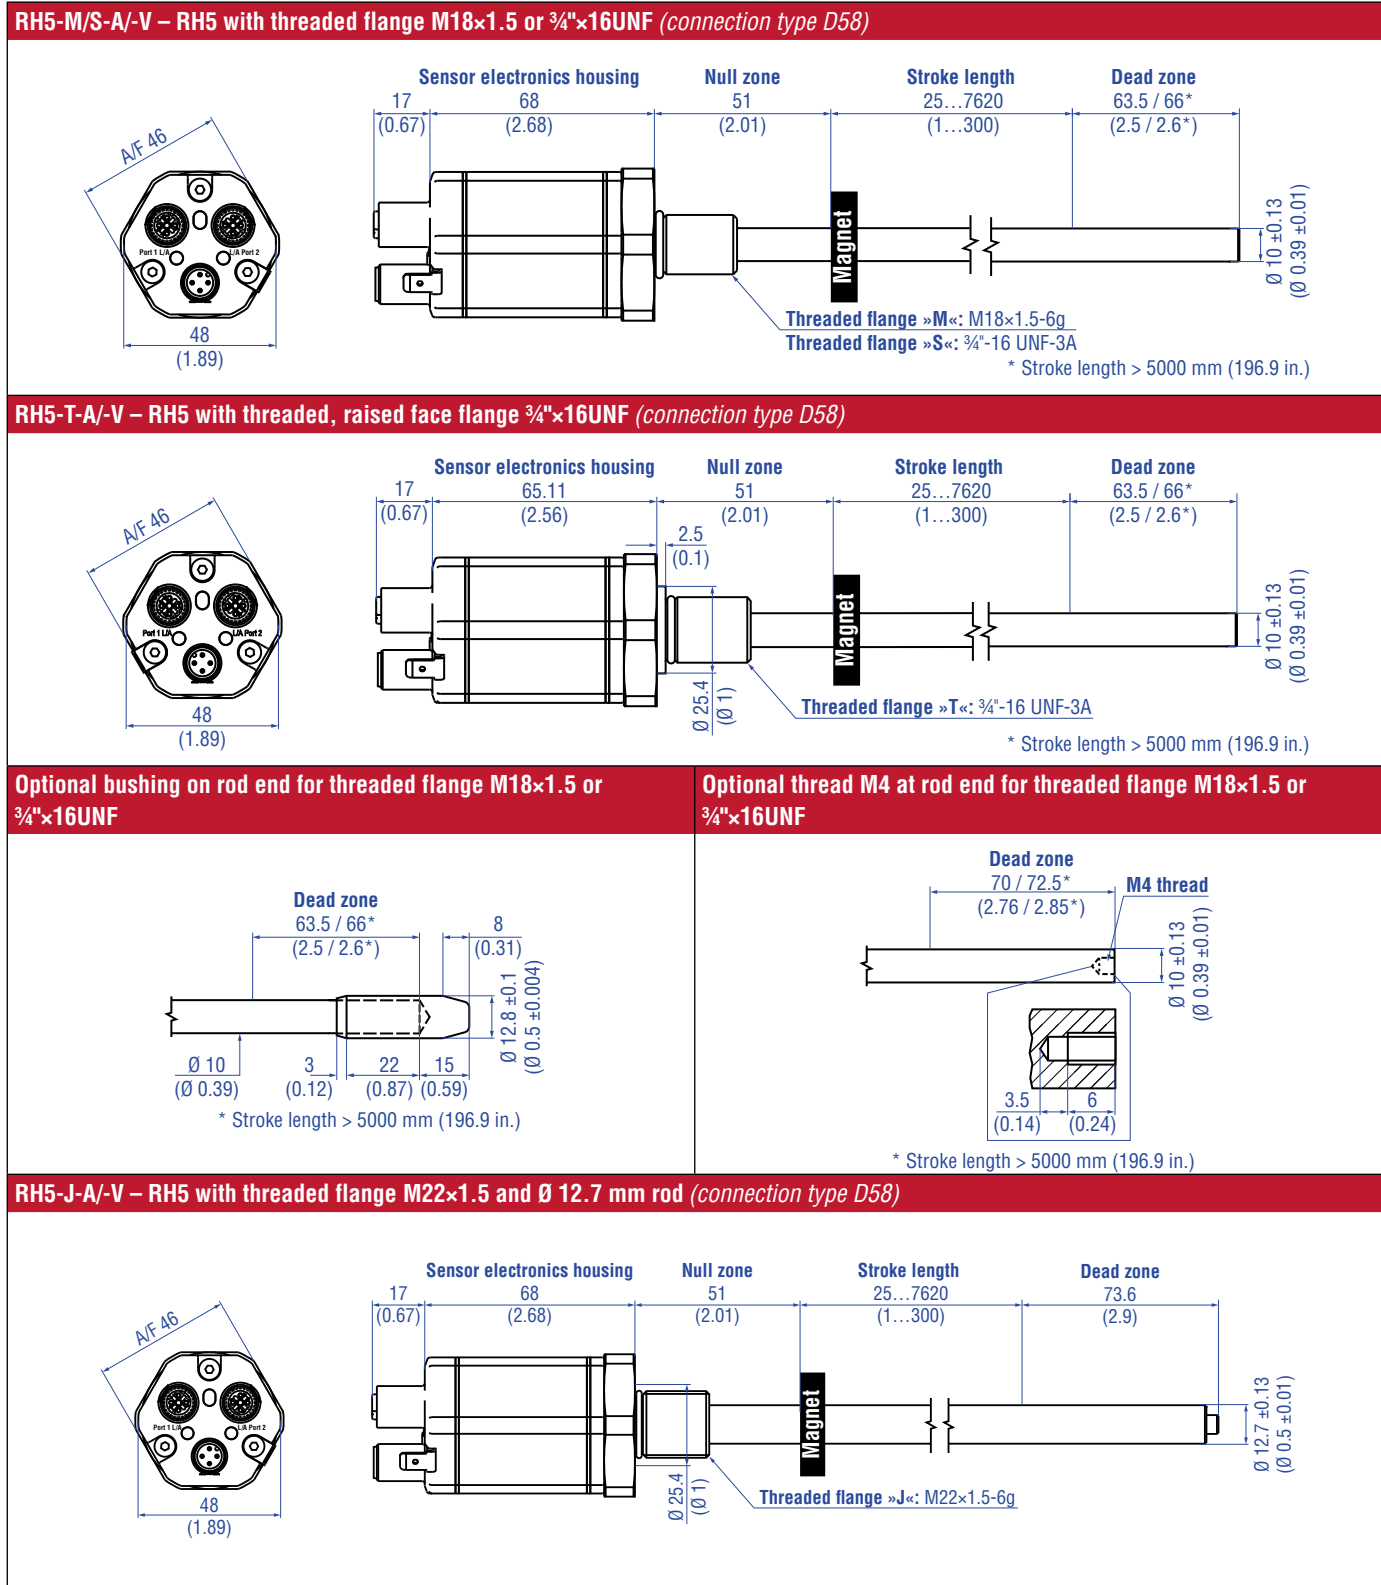


Fig. 3: Temposonics® RH5 with ring magnet

Controlling design dimensions are in millimeters and measurements in ( ) are in inches

## CONNECTOR WIRING




D56		
<b>Ports</b>		
<b>Port 1 – M12 female connector (D-coded)</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
	4	Rx (-)
	5	Not connected
<b>Port 2 – M12 female connector (D-coded)</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
	4	Rx (-)
	5	Not connected
<b>Power supply</b>		
<b>M8 male connector</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	12...30 VDC (±20 %)
	2	Not connected
	3	DC Ground (0 V)
	4	Not connected

Fig. 4: Connector wiring D56
















D58		
<b>Signal</b>		
<b>Port 1 – M12 female connector (D-coded)</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
	4	Rx (-)
	5	Not connected
<b>Port 2 – M12 female connector (D-coded)</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
	4	Rx (-)
	5	Not connected
<b>Power supply</b>		
<b>M12 male connector (A-coded)</b>	<b>Pin</b>	<b>Function</b>
 <p>View on sensor</p>	1	12...30 VDC (±20 %)
	2	Not connected
	3	DC Ground (0 V)
	4	Not connected





Fig. 5: Connector wiring D58

**FREQUENTLY ORDERED ACCESSORIES** – Additional options available in our [Accessories Guide](#)  [551444](#)

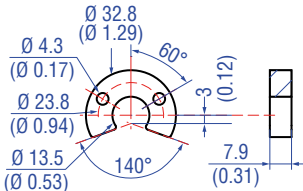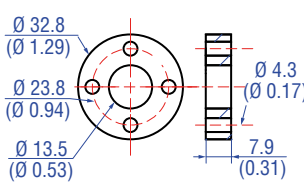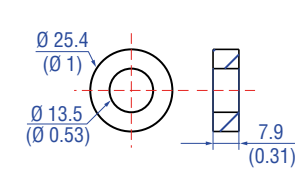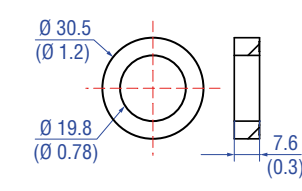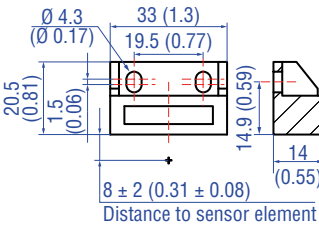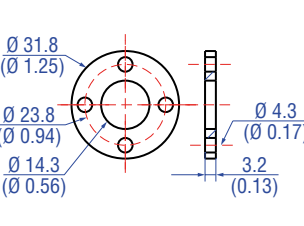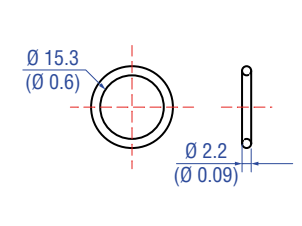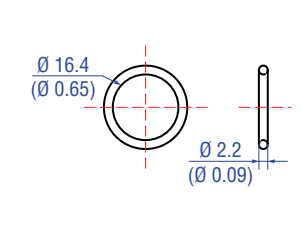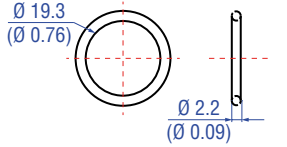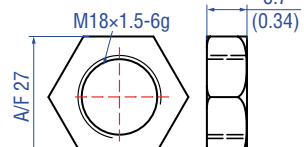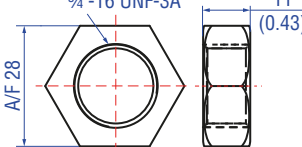

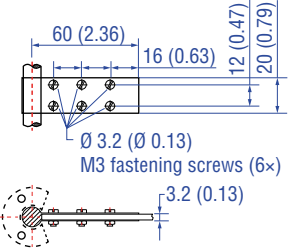

<b>Position magnets</b>			
			
<p><b>U-magnet OD33</b> Part no. 251 416-2</p>	<p><b>Ring magnet OD33</b> Part no. 201 542-2</p>	<p><b>Ring magnet OD25.4</b> Part no. 400 533</p>	<p><b>Ring magnet</b> Part no. 402 316</p>
<p>Material: PA ferrite GF20 Weight: Approx. 11 g Surface pressure: Max. 40 N/mm<sup>2</sup> Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)</p>	<p>Material: PA ferrite GF20 Weight: Approx. 14 g Surface pressure: Max. 40 N/mm<sup>2</sup> Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)</p>	<p>Material: PA ferrite Weight: Approx. 10 g Surface pressure: Max. 40 N/mm<sup>2</sup> Operating temperature: -40...+105 °C (-40...+221 °F)</p>	<p>Material: PA ferrite coated Weight: Approx. 13 g Surface pressure: Max. 20 N/mm<sup>2</sup> Operating temperature: -40...+100 °C (-40...+212 °F)</p>
<b>Position magnet      Magnet spacer      O-rings</b>			
			
<p><b>Block magnet L</b> Part no. 403 448</p>	<p><b>Magnet spacer</b> Part no. 400 633</p>	<p><b>O-ring for threaded flange</b> M18×1.5-6g Part no. 401 133</p>	<p><b>O-ring for threaded flange</b> ¾"-16 UNF-3A Part no. 560 315</p>
<p>Material: Hard ferrite Weight: Approx. 20 g Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F)</p> <p>This magnet may influence the sensor performance specifications for some applications.</p>	<p>Material: Aluminum Weight: Approx. 5 g Surface pressure: Max. 20 N/mm<sup>2</sup> Fastening torque for M4 screws: 1 Nm</p>	<p>Material: Fluoroelastomer Durometer: 75 ± 5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)</p>	<p>Material: Fluoroelastomer Durometer: 75 ± 5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)</p>
<b>O-ring      Mounting accessories</b>			
			
<p><b>O-ring for threaded flange</b> M22×1.5-6g Part no. 561 337</p>	<p><b>Hex jam nut M18×1.5-6g</b> Part no. 500 018</p>	<p><b>Hex jam nut ¾"-16 UNF-3A</b> Part no. 500 015</p>	<p><b>Fixing clip for rod with Ø 10 mm</b> Part no. 561 481</p>
<p>Material: FPM Durometer: 75 Shore A Operating temperature: -20...+200 °C (-6...+392 °F)</p>	<p>Material: Steel, zinc, plated</p>	<p>Material: Zinc plated with nylon insert</p>	<p>Application: Used to secure sensor rods (Ø 10 mm (Ø 0.39 in.)) when using an U-magnet or block magnet Material: Brass, non-magnetic</p>

Controlling design dimensions are in millimeters and measurements in ( ) are in inches

**Cable connectors<sup>3</sup>**

			
<p><b>M12 D-coded male connector (4 pin), straight</b> <b>Part no. 370 523</b></p> <p>Material: Zinc nickel-plated Termination: Insulation-displacement Cable Ø: 5.5...7.2 mm (0.2...0.28 in.) Wire: 24 AWG – 22 AWG Operating temperature: –25...+85 °C (–13...+185 °F) Ingress protection: IP65 / IP67 (correctly fitted) Fastening torque: 0.6 Nm</p>	<p><b>M12 A-coded female connector (5 pin), straight</b> <b>Part no. 370 677</b></p> <p>Material: GD-Zn, Ni Termination: Screw Contact insert: CuZn Cable Ø: 4...8 mm (0.16...0.31 in.) Wire: 1.5 mm<sup>2</sup> Operating temperature: –30...+85 °C (–22...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm</p>	<p><b>M8 female connector (4 pin), straight</b> <b>Part no. 370 504</b></p> <p>Material: CuZn nickel plated Termination: Solder Cable Ø: 3.5...5 mm (0.14...0.28 in.) Wire: 0.25 mm<sup>2</sup> Operating temperature: –40...+85 °C (–40...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.5 Nm</p>	<p><b>M12 connector end cap</b> <b>Part no. 370 537</b></p> <p>Female connectors M12 should be covered by this protective cap Material: Brass nickel-plated Ingress protection: IP67 (correctly fitted) Fastening torque: 0.39...0.49 Nm</p>

**Cables**

			
<p><b>PUR cable</b> <b>Part no. 530 125</b></p> <p>Material: PUR jacket; green Features: Cat 5, highly flexible Cable Ø: 6.5 mm (0.26 in.) Cross section: 2 × 2 × 0.35 mm<sup>2</sup> (22/7 AWG) Operating temperature: –20...+60 °C (–4...+140 °F)</p>	<p><b>PVC cable</b> <b>Part no. 530 108</b></p> <p>Material: PVC jacket; gray Features: Shielded, flexible Cable Ø: 4.9 mm (0.19 in.) Cross section: 3 × 0.34 mm<sup>2</sup> Operating temperature: –30...+80 °C (–22...+176 °F)</p>	<p><b>Cable with M12 D-coded male connector (4 pin), straight – M12 D-coded, male connector (4 pin), straight</b> <b>Part no. 530 064</b></p> <p>Material: PUR jacket; green Features: Cat 5e Cable length: 5 m (16.4 ft) Cable Ø: 6.5 mm (0.26 in.) Ingress protection: IP65, IP67, IP68 (correctly fitted) Operating temperature: –30...+70 °C (–22...+158 °F)</p>	<p><b>Cable with M12 D-coded male connector (4 pin), straight – RJ45 male connector, straight</b> <b>Part no. 530 065</b></p> <p>Material: PUR jacket; green Features: Cat 5e Cable length: 5 m (16.4 ft) Cable Ø: 6.5 mm (0.26 in.) Ingress protection M12 connector: IP67 (correctly fitted) Ingress protection RJ45 connector: IP20 (correctly fitted) Operating temperature: –30...+70 °C (–22...+158 °F)</p>

<sup>3</sup>/ Follow the manufacturer's mounting instructions

Controlling design dimensions are in millimeters and measurements in ( ) are in inches

# Temposonics® R-Series V RH EtherNet/IP™

## Data Sheet

### Cable Programming kit



**Cable with M8 female connector (4 pin), straight – pigtail**  
**Part no. 530 066 (5 m (16.4 ft.))**  
**Part no. 530 096 (10 m (32.8 ft.))**  
**Part no. 530 093 (15 m (49.2 ft.))**

**TempoLink® kit for Temposonics® R-Series V**  
**Part no. TL-1-0-EM08 (D56)**  
**Part no. TL-1-0-EM12 (D58)**

Material: PUR jacket: gray  
Features: Shielded  
Cable Ø: 8 mm (0.3 in.)  
Operating temperature:  
-40...+90 °C (-40...+194 °F)

- Connect wirelessly via Wi-Fi enabled device or via USB with the diagnostic tool
- Simple connectivity to the sensor via 24 VDC power line
- User friendly interface for mobile devices and desktop computers
- See product brief “TempoLink smart assistant” (document part no.: 551976) for further information



## ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
R	H	5										D	5		1	U	2		
a			b	c	d					e		f			g	h			

<b>a</b>	<b>Sensor model</b>
R H 5	Rod

<b>b</b>	<b>Design</b>
B	Base unit (only for replacement)
J	Threaded flange M22×1.5-6g (rod Ø 12.7 mm, 800 bar)
M	Threaded flange M18×1.5-6g (standard)
S	Threaded flange ¾"×16UNF - 3A (standard)
T	Threaded flange ¾"×16UNF - 3A (with raised-face)

<b>c</b>	<b>Mechanical options</b>
A	Standard
B	Bushing on rod end (only for flange option »M«, »S« & »T«)
M	Female thread M4 at rod end (only for flange option »M«, »S« & »T«)
V	Fluorelastomer seals for the electronics housing

<b>d</b>	<b>Stroke length</b>
X X X X M	0025...7620 mm
<b>Standard stroke length (mm)*</b>	<b>Ordering steps</b>
25 ... 500 mm	5 mm
500 ... 750 mm	10 mm
750 ... 1000 mm	25 mm
1000 ... 2500 mm	50 mm
2500 ... 5000 mm	100 mm
5000 ... 7620 mm	250 mm
X X X X U	001.0...300.0 in.
<b>Standard stroke length (in.)*</b>	<b>Ordering steps</b>
1... 20 in.	0.2 in.
20... 30 in.	0.4 in.
30... 40 in.	1.0 in.
40... 100 in.	2.0 in.
100... 200 in.	4.0 in.
200... 300 in.	10.0 in.

<b>e</b>	<b>Number of magnets</b>
X X	01...20 Position(s) (1...20 magnet(s))

<b>f</b>	<b>Connection type</b>
D 5 6	2 × M12 female connectors (5 pin), 1 × M8 male connector (4 pin)
D 5 8	2 × M12 female connectors (5 pin), 1 × M12 male connector (4 pin)

<b>g</b>	<b>System</b>
1	Standard

<b>h</b>	<b>Output</b>
U 2 0 1	EtherNet/IP™, position and velocity (1...20 positions)
U 2 1 1	EtherNet/IP™, position and velocity, internal linearization (1...20 positions)

### NOTICE

- For applications using more than 1 magnet, order the additional magnets separately.
- The number of magnets is limited by the stroke length. The minimum allowed distance between magnets (i.e. front face of one to the front face of the next one) is 75 mm (3 in.).
- Use magnets of the same type for multi-position measurement, e.g. 2 × U-magnets (part no. 251 416-2).

## DELIVERY



### RH5-B:

- Base unit (without flange/rod assembly)

Accessories have to be ordered separately.

### RH5-J / -M / -S / -T:

- Sensor
- O-ring

Manuals, Software & 3D Models available at:  
[www.temposonics.com](http://www.temposonics.com)

\* / Non standard stroke lengths are available; must be encoded in 5 mm / 0.1 in. increments

**UNITED STATES**  
**Temposonics, LLC**  
Americas & APAC Region  
3001 Sheldon Drive  
Cary, N.C. 27513  
Phone: +1 919 677-0100  
E-mail: info.us@temposonics.com

**GERMANY**  
**Temposonics**  
**GmbH & Co. KG**  
EMEA Region & India  
Auf dem Schüffel 9  
58513 Lüdenscheid  
Phone: +49 2351 9587-0  
E-mail: info.de@temposonics.com

**ITALY**  
Branch Office  
Phone: +39 030 988 3819  
E-mail: info.it@temposonics.com

**FRANCE**  
Branch Office  
Phone: +33 6 14 060 728  
E-mail: info.fr@temposonics.com

**UK**  
Branch Office  
Phone: +44 79 21 83 05 86  
E-mail: info.uk@temposonics.com

**SCANDINAVIA**  
Branch Office  
Phone: +46 70 29 91 281  
E-mail: info.sca@temposonics.com

**CHINA**  
Branch Office  
Phone: +86 21 2415 1000 / 2415 1001  
E-mail: info.cn@temposonics.com

**JAPAN**  
Branch Office  
Phone: +81 3 6416 1063  
E-mail: info.jp@temposonics.com

**Document Part Number:**  
551954 Revision B (EN) 05/2018



**temposonics.com**