


## Data Sheet

# T-Serie – TH Analog SIL 2-fähig

## Magnetostrictive Linear Position Sensors

- ATEX / UK Ex / IECEx / CEC / NEC / EAC Ex / KCs / CCC certified / Japanese approval
- Continuous operation under harsh industrial conditions
- Flameproof / Explosionproof / Increased safety

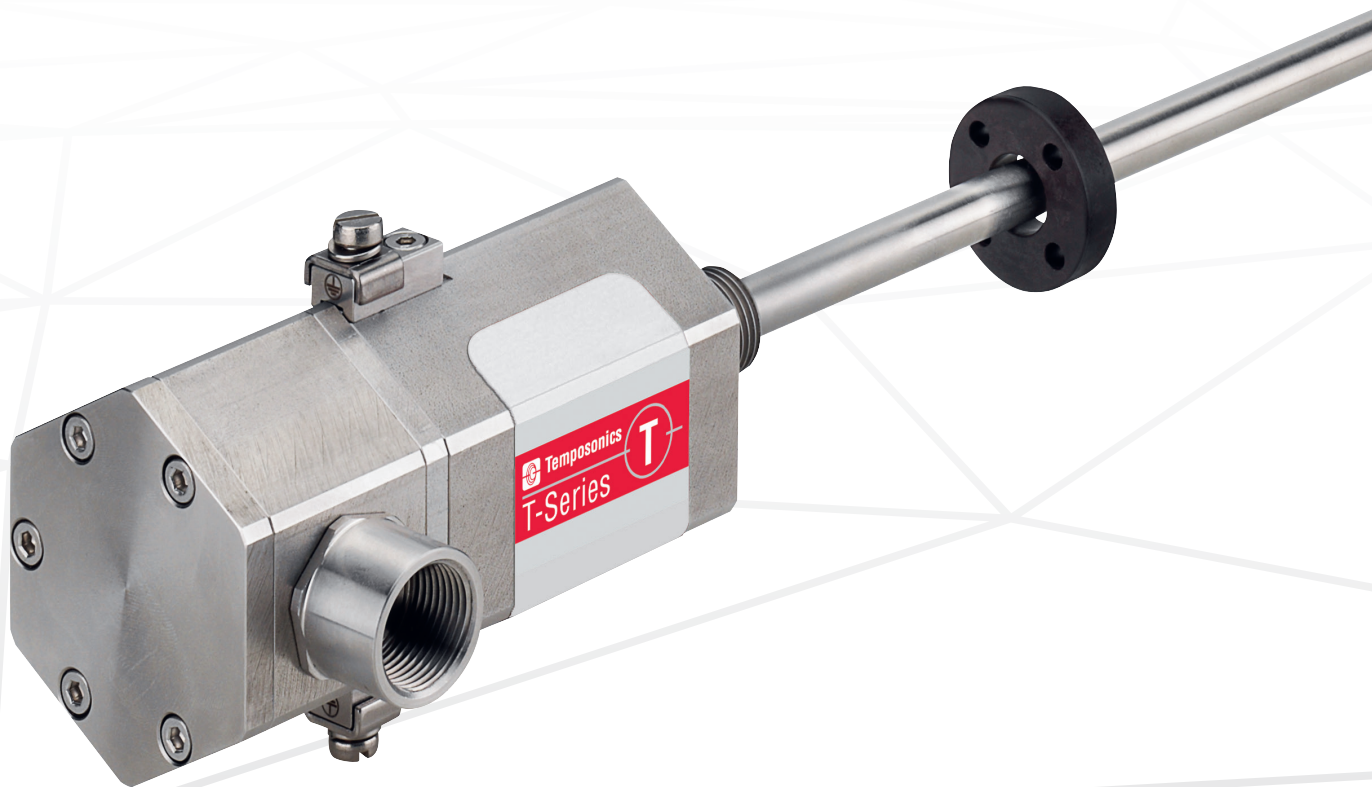

## MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Temposonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the beginning of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

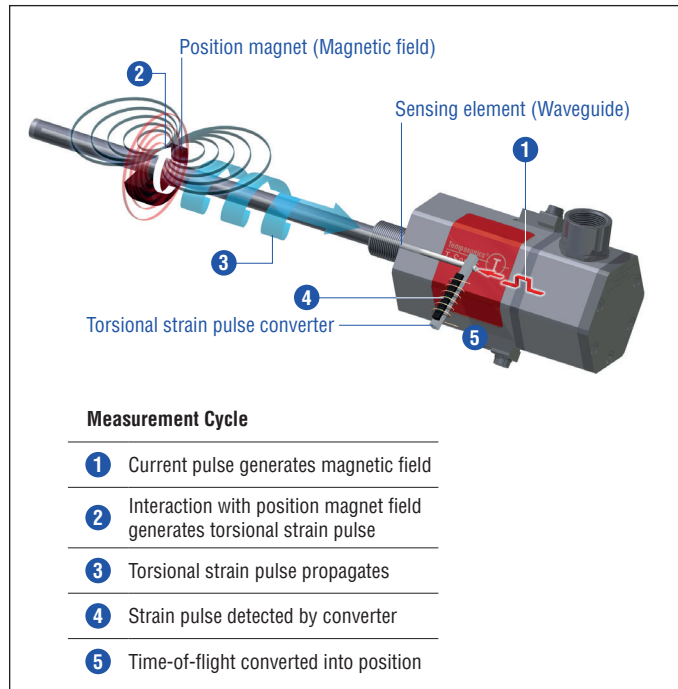


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

## TH SENSOR



Robust, non-contact and wear free, the Temposonics® linear position sensors provide best durability and accurate position measurement solutions in harsh industrial environments. The position measurement accuracy is tightly controlled by the quality of the waveguide which is manufactured by Temposonics. The position magnet is mounted on the moving machine part and travels contactlessly over the sensor rod with the built-in waveguide.

The TH sensor is extremely robust and ideal for continuous operation under harsh industrial conditions. The T-Series sensors are certified for hazardous areas in Zone 0/1, Zone 1, Zone 2, Zone 21 and Zone 22 for the European (ATEX), the English, Welsh and Scottish (UK Ex), the global (IECEX) market, the Eurasian Economic Union (EAC Ex), the South Korean (KCs), the Chinese (CCC) and the Japanese market. Further certifications are Class I, II, III, Division 1, Division 2 for Canada (CEC) and USA (NEC). The T-Series sensors meet the requirements for SIL 2. The sensor electronics housing contains the active signal conditioning and a complete integrated electronics interface. The sensor rod is capable of withstanding high pressures such as those found in hydraulic cylinders. Furthermore the sensor is also suitable for petro chemical plants and caustic environments. In addition the sensor meets the ingress protection IP66/IP67/IP68 (100 m for 7 days)/IP69 and NEMA 4 (for sensor assembly in stainless steel 1.4305 (AISI 303)) or NEMA 4x (for sensor assembly in stainless steel 1.4404 (AISI 316L)).



Fig. 2: Typical application: Tank systems

## TECHNICAL DATA

| Output                                |  |
|---------------------------------------|--|
| Current                               | 4...20 mA, 20...4 mA (minimum/maximum load 0/500 Ω)  |
| Measured value                        | Position   |
| Measurement parameters                |  |
| Resolution                            | 16 bit; 0.0015 % (minimum 1 μm) <sup>1</sup>   |
| Cycle time                            | 2.0 ms   |
| Linearity <sup>2</sup>                | < ±0.01 % F.S. (minimum ±50 μm)  |
| Repeatability                         | < ±0.001 % F.S. (minimum ±2.5 μm) typical  |
| Hysteresis                            | < 4 μm typical   |
| Temperature coefficient               | < 30 ppm/K typical   |
| Operating conditions                  |  |
| Operating temperature                 | Version E: -40...+80 °C (-40...+176 °F)<br>Version D, G: -40...+85 °C (-40...+185 °F)  |
| Humidity                              | 90 % relative humidity, no condensation  |
| Ingress protection                    | IP66/IP67/IP68 (100 m for 7 days)/IP69 and NEMA 4 (for sensor assembly in stainless steel 1.4305 (AISI 303)) or NEMA 4X (for sensor assembly in stainless steel 1.4404 (AISI 316L)) (if appropriate pipes, glands, etc. are connected properly)  |
| Shock test                            | 100 g (single shock), IEC standard 60068-2-27  |
| Vibration test                        | 15 g/10...2000 Hz, IEC standard 60068-2-6 (resonance frequencies excluded)   |
| EMC test                              | Electromagnetic emission according to IEC/EN 61326-1 (Class B)<br>Electromagnetic immunity according to IEC/EN 61326-3-2 (Class B)<br>The sensor meets the requirements of the EU directives and is marked with <br>The sensor meets the requirements of the UK-legislations and is marked with  |
| Operating pressure                    | 350 bar static (5076 psi static)   |
| Magnet movement velocity <sup>3</sup> | Any  |
| Design/Material                       |  |
| Sensor electronics housing            | Stainless steel 1.4305 (AISI 303); option: Stainless steel 1.4404 (AISI 316L)  |
| Flange                                | See "Table 1: TH rod sensor threaded flange type references" on page 7   |
| Sensor rod                            | Stainless steel 1.4306 (AISI 304L); option: Stainless steel 1.4404 (AISI 316L)   |
| Stroke length                         | 25...1500 mm (1...60 in.)  |
| Mechanical mounting                   |  |
| Mounting position                     | Any orientation  |
| Mounting instruction                  | Please consult the technical drawings and the operation manual (document number: <a href="#">551513</a> )  |
| Electrical connection                 |  |
| Connection type                       | T-Series terminal  |
| Operating voltage                     | +24 VDC (-15/+20 %)  |
| Ripple                                | ≤ 0.28 V <sub>pp</sub>   |
| Current consumption                   | 100 mA typical   |
| Dielectric strength                   | 700 VDC (DC ground to machine ground)  |
| Polarity protection                   | Up to -30 VDC  |
| Overvoltage protection                | Up to 36 VDC   |

1/ The internal digital value is transferred via a 16 bit D/A converter into a proportional, analog current signal

2/ With position magnet # 201 542-2

3/ If there is contact between the moving magnet (including the magnet holder) and the sensor rod, make sure that the maximum speed of the moving magnet is ≤ 1 m/s (Safety requirement due to ESD [Electro Static Discharge])

## CERTIFICATIONS

| Certification required                                       | Version E   | Version D  | Version G   | Version N                     |
|--|---|--|---|-------------------------------|
| <b>IECEx/ATEX</b><br>(IECEx: Global market;<br>ATEX: Europe) | Ex db eb IIC T4 Ga/Gb<br>Ex tb IIIC T130°C Ga/Db<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 80 °C  | Ex db IIC T4 Ga/Gb<br>Ex tb IIIC T130°C Ga/Db<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 85 °C  | Ex db IIC T4 Ga/Gb<br>Ex tb IIIC T130°C Ga/Db<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 85 °C   | No hazardous<br>area approval |
| <b>UK Ex</b><br>(England, Wales and<br>Scotland)             | Ex db eb IIC T4 Ga/Gb<br>Ex tb IIIC T130°C Ga/Db<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 80 °C  | Ex db IIC T4 Ga/Gb<br>Ex tb IIIC T130°C Ga/Db<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 85 °C  | Ex db IIC T4 Ga/Gb<br>Ex tb IIIC T130°C Ga/Db<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 85 °C   | No hazardous<br>area approval |
| <b>NEC</b><br>(USA)  | <b>Non-incendive</b><br>Class I Div. 2<br>Groups A, B, C, D T4<br>Class II/III Div. 2<br>Groups E, F, G<br>-40 °C ≤ Ta ≤ 80 °C<br><br><b>Non-sparking</b><br>Class I Zone 2 AEx nA IIC<br>T4 Gc<br>Class II/III Zone 22 AEx tc<br>IIIC T130°C Dc<br>-40 °C ≤ Ta ≤ 80 °C | —  | <b>Explosionproof</b><br>Class I Div. 1<br>Groups A, B, C, D T4<br>Class II/III Div. 1<br>Groups E, F, G T130°C<br>-40 °C ≤ Ta ≤ 85 °C<br><br><b>Flameproof</b><br>Class I Zone 0/1 AEx d IIC T4<br>Class II/III Zone 21 AEx tb IIIC T130°C<br>-40 °C ≤ Ta ≤ 85 °C        | No hazardous<br>area approval |
| <b>CEC</b><br>(Canada)                                       | <b>Non-incendive</b><br>Class I Div. 2<br>Groups A, B, C, D T4<br>Class II/III Div. 2<br>Groups E, F, G<br>-40 °C ≤ Ta ≤ 80 °C<br><br><b>Non-sparking</b><br>Class I Zone 2 Ex nA IIC<br>T4 Gc<br>Class II/III Zone 22 Ex tc<br>IIIC T130°C Dc<br>-40 °C ≤ Ta ≤ 80 °C   | —  | <b>Explosionproof</b><br>Class I Div. 1<br>Groups B, C, D T4<br>Class II/III Div. 1<br>Groups E, F, G T130°C<br>-40 °C ≤ Ta ≤ 85 °C<br><br><b>Flameproof</b><br>Class I Zone 0/1 Ex d IIC T4 Ga/Gb<br>Class II/III Zone 21 Ex tb IIIC T130°C<br>Db<br>-40 °C ≤ Ta ≤ 85 °C | No hazardous<br>area approval |
| <b>EAC Ex</b><br>(Eurasian Economic Union)                   | Ga/Gb Ex db eb IIC T4 X<br>Ex tb IIIC T130°C Db X<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 80 °C   | Ga/Gb Ex db IIC T4 X<br>Ex tb IIIC T130°C Db X<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 85 °C | Ga/Gb Ex db IIC T4 X<br>Ex tb IIIC T130°C Db X<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 85 °C  | No hazardous<br>area approval |
| <b>KCs</b><br>(South Korea)                                  | Ex d e IIC T4<br>Ex tb IIIC T130°C<br>Zone 0/1; Zone 21<br>-40 °C ≤ Ta ≤ 80 °C  | Ex d IIC T4<br>Ex tb IIIC T130°C<br>Zone 0/1; Zone 21<br>-40 °C ≤ Ta ≤ 85 °C               | Ex d IIC T4<br>Ex tb IIIC T130°C<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 85 °C  | No hazardous<br>area approval |
| <b>Japanese approval</b>                                     | Ex d e IIC T4 Ga/Gb<br>Ex t IIIC T130°C Db<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 80 °C  | Ex d IIC T4 Ga/Gb<br>Ex t IIIC T130°C Db<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 85 °C       | Ex d IIC T4 Ga/Gb<br>Ex t IIIC T130°C Db<br>Zone 0/1, Zone 21<br>-40 °C ≤ Ta ≤ 85 °C  | No hazardous<br>area approval |
| <b>CCC</b><br>(China)  | Ex d e IIC T4 Gb<br>Ex tD A21 IP66/67 T130°C<br>Zone 1, Zone 21<br>-40 °C ≤ Ta ≤ 80 °C  | Ex d IIC T4 Gb<br>Ex tD A21 IP66/67 T130°C<br>Zone 1, Zone 21<br>-40 °C ≤ Ta ≤ 85 °C       | Ex d IIC T4 Gb<br>Ex tD A21 IP66/67 T130°C<br>Zone 1, Zone 21<br>-40 °C ≤ Ta ≤ 85 °C  | No hazardous<br>area approval |

Fig. 3: Certifications

## THE SAFETY FUNCTION

The T-Series safety sensor will continuously output a position signal proportional to the magnet position, and the internal diagnostic function will check safety relevant parameters within the hardware. The sensor will report an output error signal in the event of a failure. The electronic control unit (ECU) receives the provided signals. In the event of a failure, the ECU must react in an appropriate manner in order to manage the emergency function. The system will shut off or operate in emergency mode. Refer to the SIL 2 safety manual (document number: [551504](#)) for more in-depth information on SIL 2.

| <b>T-Series (SIL 2: Analog Safety) IEC 61508</b>  |  |
|---|--|
| Safety Level                                      | SIL 2  |
| Device type                                       | B  |
| MTTF <sub>d</sub>                                 | 100 years @ 60 °C<br>44 years @ 80 °C        |
| PFD <sub>avg</sub>                                | 3.49E-04 @ 60 °C<br>9.85E-04 @ 80 °C         |
| Diagnostic Response Time<br>(Fail Detection Time) | 25 ms (max)<br>1 sec for CRC fault detection |
| % of SIL 2 range for PFD                          | 3.5 % @ 60 °C<br>9.9 % @ 80 °C               |
| Hardware Fault Tolerance (HFT)                    | 0  |
| Useful lifetime                                   | 50 years @ 60 °C<br>18 years @ 80 °C         |
| Device @ 1 % accuracy<br>(60 °C / 80 °C / 85 °C)  | SFF 93.6 %                                   |

Fig. 4: Sensor parameters TH SIL 2

## TECHNICAL DRAWINGS

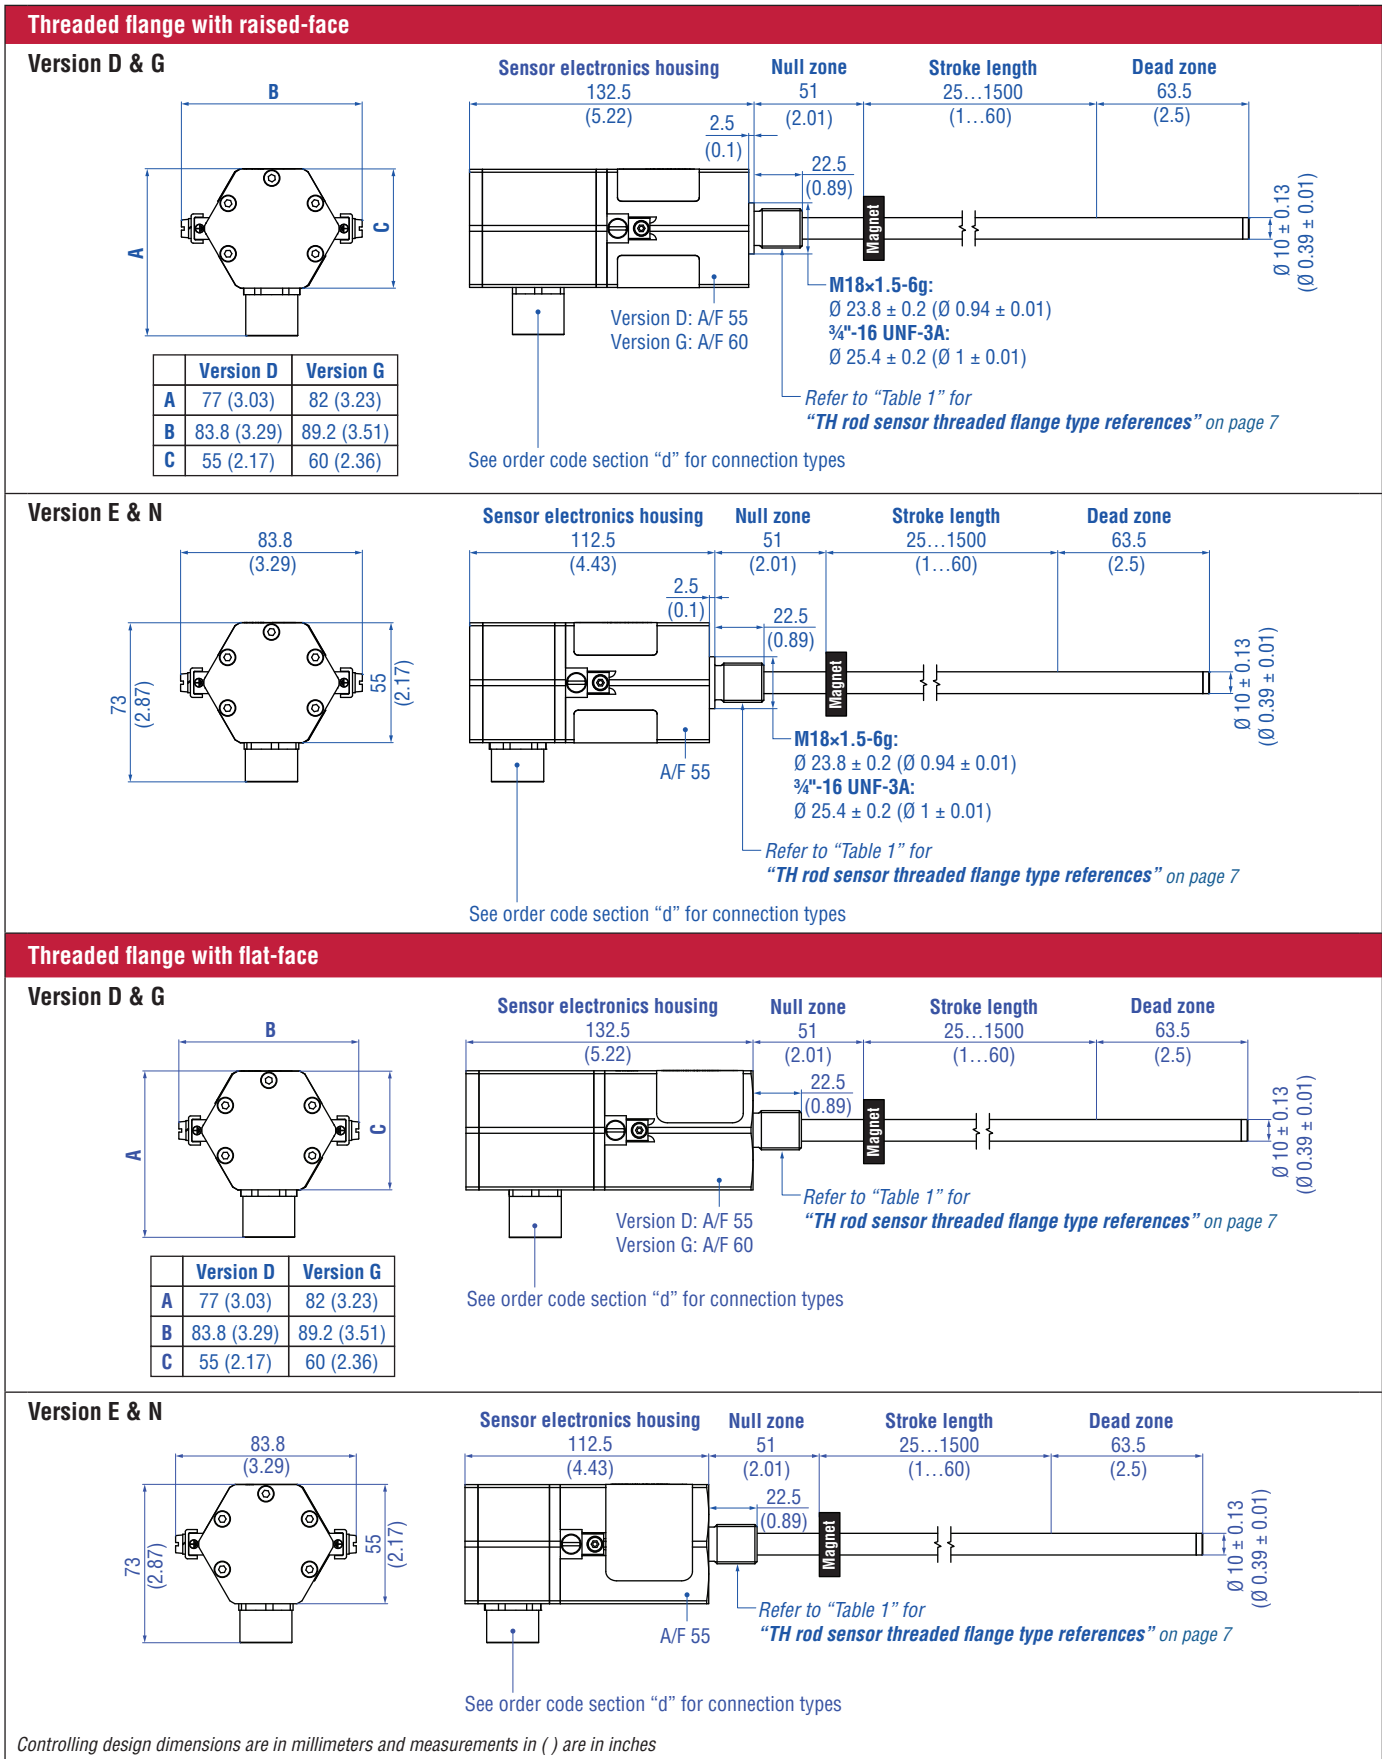


Fig. 5: Temposonics® TH with ring magnet

## CONNECTION OPTIONS

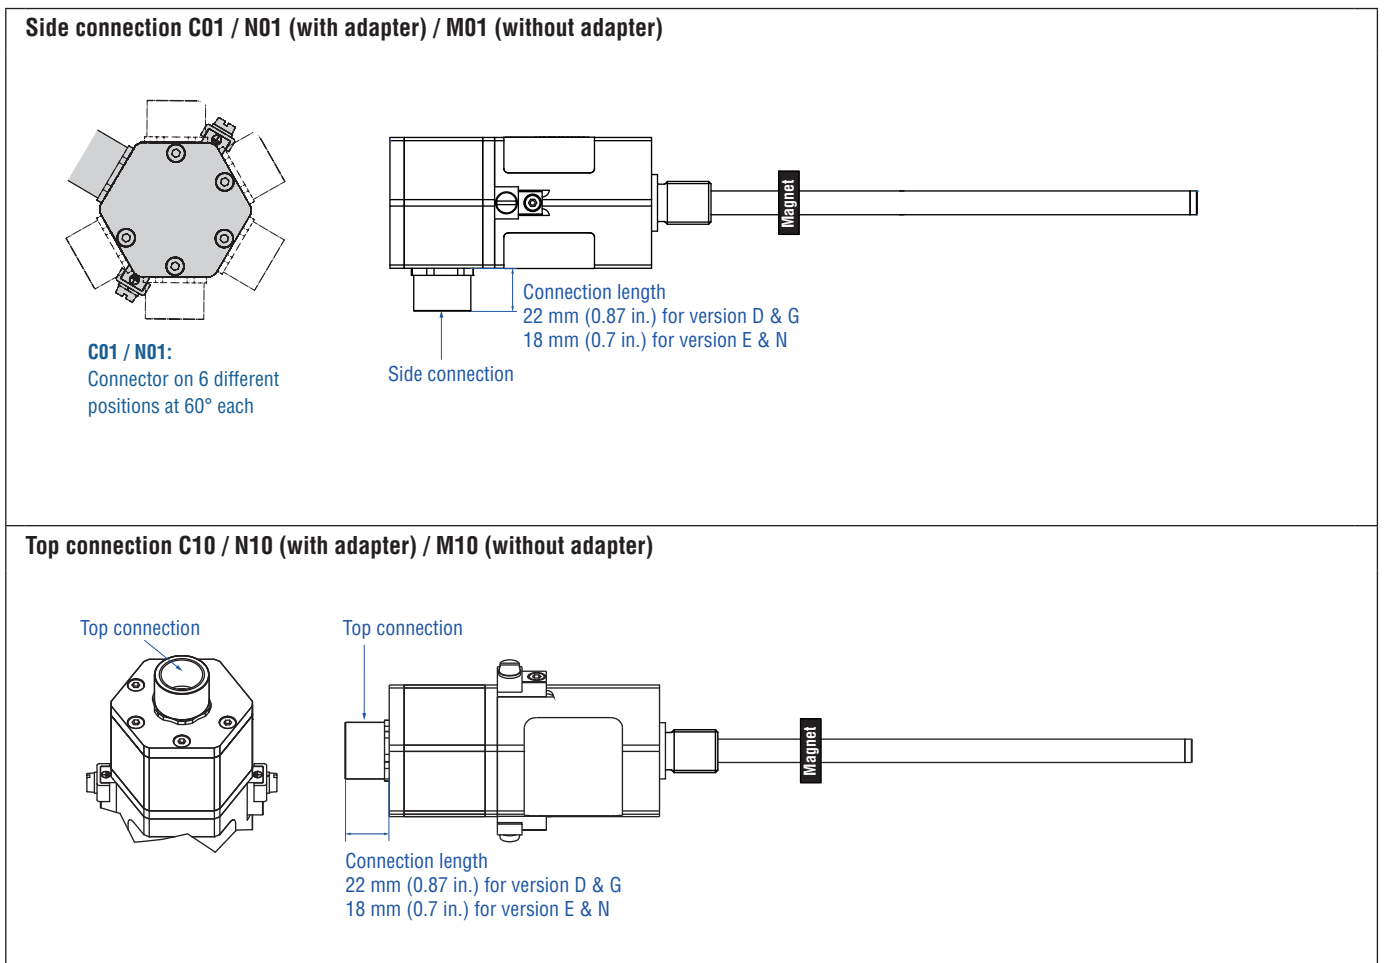



Fig. 6: Temposonics® TH connection options

| Threaded flange type | Description  | Threaded flange |
|----------------------|--|-----------------|
| F                    | Threaded flange with flat-face<br>Stainless steel 1.4404 (AISI 316L)   | ¾"-16 UNF-3A    |
| G                    | Threaded flange with raised-face<br>Stainless steel 1.4404 (AISI 316L) | ¾"-16 UNF-3A    |
| M                    | Threaded flange with flat-face<br>Stainless steel 1.4305 (AISI 303)    | M18×1.5-6g      |
| N                    | Threaded flange with raised-face<br>Stainless steel 1.4305 (AISI 303)  | M18×1.5-6g      |
| S                    | Threaded flange with flat-face<br>Stainless steel 1.4305 (AISI 303)    | ¾"-16 UNF-3A    |
| T                    | Threaded flange with raised-face<br>Stainless steel 1.4305 (AISI 303)  | ¾"-16 UNF-3A    |
| W                    | Threaded flange with flat-face<br>Stainless steel 1.4404 (AISI 316L)   | M18×1.5-6g      |

Table 1: TH rod sensor threaded flange type references

## ZONE CLASSIFICATION

**Version D & G (example: Threaded flange with raised-face)**  
Flameproof (explosionproof) housing with flameproof (explosionproof) connection chamber  
Version D: ATEX / UK Ex / IECEx / KCs / EAC Ex / CCC / Japanese Approval  
Version G: ATEX / UK Ex / IECEx / CEC / NEC / KCs / EAC Ex / CCC / Japanese Approval

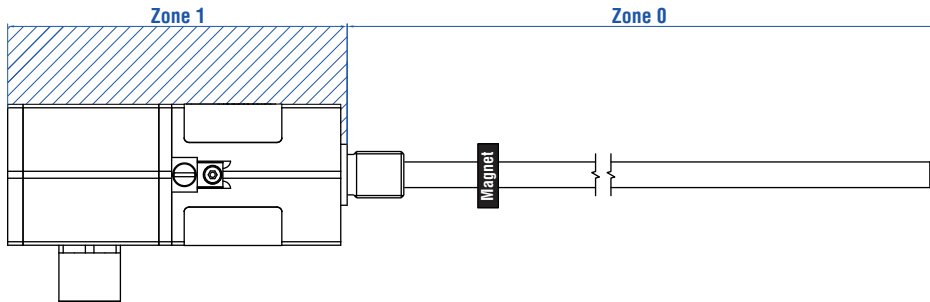

**Version E (example: Threaded flange with raised-face)**  
Flameproof housing with increased safety connection chamber  
ATEX / UK Ex / IECEx / CEC / NEC / KCs / EAC Ex / CCC / Japanese Approval

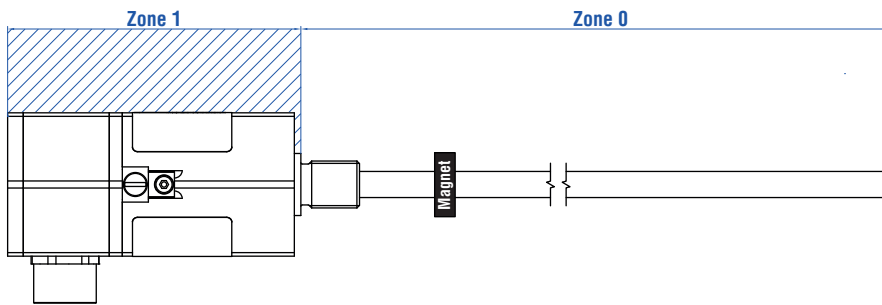


Fig. 7: Temposonics® TH Zone classification

### NOTICE

Seal sensor according to ingress protection IP67 between Zone 0 and Zone 1.



## CONNECTOR WIRING


| Version D & G<br>suitable for connection types: C01, C10, N01, N10                |     |                     |
|---|-----|---------------------|
| Signal + power supply   |     |                     |
| Terminal  | Pin | Function            |
|  | 1   | Output              |
|   | 2   | Signal Ground       |
|   | 3   | Not connected       |
|   | 4   | Not connected       |
|   | 5   | +24 VDC (-15/+20 %) |
|   | 6   | DC Ground (0 V)     |
|   | 7   | Cable shield        |

Fig. 8: TH (version D & G) wiring diagram (2.5 mm<sup>2</sup> conductor)







| Version E & N<br>suitable for connection types: C01, C10, M01, M10, N01, N10        |     |                     |
|---|-----|---------------------|
| Signal + power supply   |     |                     |
| Terminal  | Pin | Function            |
|  | 1   | Output              |
|   | 2   | Signal Ground       |
|   | 3   | Not connected       |
|   | 4   | Not connected       |
|   | 5   | +24 VDC (-15/+20 %) |
|   | 6   | DC Ground (0 V)     |
|   | 7   | Cable shield        |



Fig. 9: TH (version E & N) wiring diagram (1.5 mm<sup>2</sup> conductor)

**FREQUENTLY ORDERED ACCESSORIES** – Additional options available in our [Accessories Guide](#)  [551444](#)

**Position magnet**

|  |  |  |  |
|--|--|--|--|
|    |   |    |   |
| <p><b>Ring magnet OD33</b><br/>Part no. 201 542-2</p>  | <p><b>Ring magnet OD25.4</b><br/>Part no. 400 533</p>  | <p><b>U-magnet OD33</b><br/>Part no. 251 416-2</p>   | <p><b>U-magnet OD63.5</b><br/>Part no. 201 553</p>   |
| <p>Material: PA ferrite GF20<br/>Weight: Approx. 14 g<br/>Surface pressure: Max. 40 N/mm<sup>2</sup><br/>Fastening torque for M4 screws: 1 Nm<br/>Operating temperature:<br/>-40...+105 °C (-40...+221 °F)</p> | <p>Material: PA ferrite<br/>Weight: Approx. 10 g<br/>Surface pressure: Max. 40 N/mm<sup>2</sup><br/>Operating temperature:<br/>-40...+105 °C (-40...+221 °F)</p> | <p>Material: PA ferrite GF20<br/>Weight: Approx. 11 g<br/>Surface pressure: Max. 40 N/mm<sup>2</sup><br/>Fastening torque for M4 screws: 1 Nm<br/>Operating temperature:<br/>-40...+105 °C (-40...+221 °F)</p> | <p>Material: PA 66-GF30, magnets compound-filled<br/>Weight: Approx. 26 g<br/>Surface pressure: 20 N/mm<sup>2</sup><br/>Fastening torque for M4 screws: 1 Nm<br/>Operating temperature:<br/>-40...+75 °C (-40...+167 °F)</p> |

**Magnet spacer** **Float<sup>4</sup>**





|   |  |
|---|--|
|   |    |
| <p><b>Magnet spacer</b><br/>Part no. 400 633</p>  | <p><b>Float</b><br/>Part no. 200 938-2</p>   |
| <p>Material: Aluminum<br/>Weight: Approx. 5 g<br/>Surface pressure: Max. 20 N/mm<sup>2</sup><br/>Fastening torque for M4 screws: 1 Nm</p> | <p>Material: Stainless steel (AISI 316L)<br/>Weight offset: Yes<br/>Pressure: 8.6 bar (125 psi)<br/>Magnet offset: No<br/>Specific gravity: Max. 0.74<br/>Operating temperature:<br/>-40...+125 °C (-40...+257 °F)</p> |

Controlling design dimensions are in millimeters and measurements in ( ) are in inches

- 4/
- Be sure that the float specific gravity is at least 0.05 less than that of the measured liquid as a safety margin at ambient temperature
  - For interface measurement: A minimum of 0.05 specific gravity differential is required between the upper and lower liquids

- When the magnet is not shown, the magnet is positioned at the center line of float
- An offset weight is installed in the float to bias or tilt the float installed on the sensor tube. So the float remains in contact with the sensor tube at all times and guarantees permanent potential equalization of the float. The offset is required for installations that must conform to hazardous location standards

**Stop collar      Optional installation hardware      O-rings**



**Stop collar for Ø 10 mm  
Part no. 560 777**

Provides end of stroke stops for float  
Material: Stainless steel 1.4301  
(AISI 304)  
Weight: Approx. 30 g  
Hex key 3/64" required

**Fixing clip  
Part no. 561 481**

Application: Used to secure sensor rods (Ø 10 mm (Ø 0.39 in.)) when using an U-magnet or block magnet  
Material: Brass, non-magnetic

**O-ring for threaded flange  
M18x1.5-6g  
Part no. 401 133**

Material: Fluoroelastomer  
Durometer: 75 ± 5 Shore A  
Operating temperature:  
-40...+204 °C (-40...+400 °F)

**O-ring for threaded flange  
3/4"-16 UNF-3A  
Part no. 560 315**

Material: Fluoroelastomer  
Durometer: 75 ± 5 Shore A  
Operating temperature:  
-40...+204 °C (-40...+400 °F)

Controlling design dimensions are in millimeters and measurements in ( ) are in inches

## ORDER CODE

|   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| T | H |   |   |   |   |   |   |   |    |    | 1  |    |    | S  | N  |    |    |
| a |   | b | c |   |   |   |   | d |    |    | e  | f  | g  | h  | i  |    |    |

|          |                     |
|----------|---------------------|
| <b>a</b> | <b>Sensor model</b> |
| T H      | Rod                 |

|   |   |
|---|---|
| <b>b</b>  | <b>Design</b>                                   |
| <b>Enclosure Type 4:</b><br>TH rod sensor with housing material stainless steel 1.4305 (AISI 303) and rod material stainless steel 1.4306 (AISI 304L)   |   |
| M   | Threaded flange with flat-face (M18×1.5-6g)     |
| N   | Threaded flange with raised-face (M18×1.5-6g)   |
| S   | Threaded flange with flat-face (¾"-16 UNF-3A)   |
| T   | Threaded flange with raised-face (¾"-16 UNF-3A) |
| <b>Enclosure Type 4X:</b><br>TH rod sensor with housing material stainless steel 1.4404 (AISI 316L) and rod material stainless steel 1.4404 (AISI 316L) |   |
| F   | Threaded flange with flat-face (¾"-16 UNF-3A)   |
| G   | Threaded flange with raised-face (¾"-16 UNF-3A) |
| W   | Threaded flange with flat-face (M18×1.5-6g)     |

|  |                      |
|--|----------------------|
| <b>c</b>   | <b>Stroke length</b> |
| X X X X M  | 0025...1500 mm       |
| <b>Standard stroke length (mm)</b>   |                      |
| 25 ... 500 mm  | 5 mm                 |
| 500 ... 750 mm   | 10 mm                |
| 750...1000 mm  | 25 mm                |
| 1000...1500 mm   | 50 mm                |
| X X X X U  | 001.0...060.0 in.    |
| <b>Standard stroke length (in.)</b>  |                      |
| 1...20 in.   | 0.2 in.              |
| 20...30 in.  | 0.4 in.              |
| 30...40 in.  | 1.0 in.              |
| 40...60 in.  | 2.0 in.              |
| Non Standard stroke lengths are available; must be encoded in 5 mm/0.1 in. increments. |                      |

|          |  |
|----------|--|
| <b>d</b> | <b>Connection type</b>                                 |
| C 0 1    | Side connection with thread ½"-14 NPT (All versions)   |
| C 1 0    | Top connection with thread ½"-14 NPT (All versions)    |
| M 0 1    | Side connection with thread M16×1.5-6H (Version E & N) |
| M 1 0    | Top connection with thread M16×1.5-6H (Version E & N)  |

|          |   |
|----------|---|
| <b>d</b> | <b>Connection type (continued)</b>                    |
| N 0 1    | Side connection with thread M20×1.5-6H (All versions) |
| N 1 0    | Top connection with thread M20×1.5-6H (All versions)  |

|          |                          |
|----------|--------------------------|
| <b>e</b> | <b>Operating voltage</b> |
| 1        | +24 VDC (-15/+20 %)      |

|          |   |
|----------|---|
| <b>f</b> | <b>Version</b><br>(see "Certifications" on page 4 for further information)  |
| D        | Ex db and Ex tb (A/F 55)  |
| E        | Ex db eb and Ex tb (A/F 55)<br>US & CA approval: Ex nA /NI (for Zone 2 and 22)  |
| G        | Ex db and Ex tb (A/F 60)<br>US & CA approval: Explosionproof (XP)<br><b>(Note: Group A is not available for Canada)</b> |
| N        | Not approved  |

|          |  |
|----------|--|
| <b>g</b> | <b>Functional safety type</b>              |
| S        | SIL 2 (with certificate and safety manual) |

|          |                               |
|----------|-------------------------------|
| <b>h</b> | <b>Additional option type</b> |
| N        | None                          |

|   |               |
|---|---------------|
| <b>i</b>  | <b>Output</b> |
| 1 output with 1 position magnet<br>Output 1 (position magnet 1) |               |
| A 0 1   | 4...20 mA     |
| A 1 1   | 20...4 mA     |

## DELIVERY



Sensor

Accessories have to be ordered separately

Manuals, Software & 3D Models available at:  
[www.temposonics.com](http://www.temposonics.com)

**UNITED STATES**  
**Temposonics, LLC**  
Americas & APAC Region  
3001 Sheldon Drive  
Cary, N.C. 27513  
Phone: +1 919 677-0100  
E-mail: [info.us@temposonics.com](mailto:info.us@temposonics.com)

**GERMANY**  
**Temposonics**  
**GmbH & Co. KG**  
EMEA Region & India  
Auf dem Schüffel 9  
58513 Lüdenscheid  
Phone: +49 2351 9587-0  
E-mail: [info.de@temposonics.com](mailto:info.de@temposonics.com)

**ITALY**  
Branch Office  
Phone: +39 030 988 3819  
E-mail: [info.it@temposonics.com](mailto:info.it@temposonics.com)

**FRANCE**  
Branch Office  
Phone: +33 6 14 060 728  
E-mail: [info.fr@temposonics.com](mailto:info.fr@temposonics.com)

**UK**  
Branch Office  
Phone: +44 79 21 83 05 86  
E-mail: [info.uk@temposonics.com](mailto:info.uk@temposonics.com)

**SCANDINAVIA**  
Branch Office  
Phone: +46 70 29 91 281  
E-mail: [info.sca@temposonics.com](mailto:info.sca@temposonics.com)

**CHINA**  
Branch Office  
Phone: +86 21 2415 1000 / 2415 1001  
E-mail: [info.cn@temposonics.com](mailto:info.cn@temposonics.com)

**JAPAN**  
Branch Office  
Phone: +81 3 6416 1063  
E-mail: [info.jp@temposonics.com](mailto:info.jp@temposonics.com)

**Document Part Number:**  
551603 Revision I (EN) 04/2022



**temposonics.com**